


SPROCKETS			SIMPLEX			DUPLEX		
Z	d _e	d _p	d _m	D ₁	A	d _m	D ₂	A
10	35.70	30.82	20	8	20			
11	38.69	33.80	22	8	25			
12	41.68	36.80	25	8	25			
13	44.68	39.80	28	8	25	28	10	25
14	47.68	42.80	31	8	25	31	10	25
15	50.69	45.81	34	8	25	34	10	25
16	53.70	48.82	37	10	28	37	12	30
17	56.72	51.83	38	10	28	40	12	30
18	59.73	54.85	38	10	28	43	12	30
19	62.75	57.87	45	10	28	46	12	30
20	65.77	60.89	46	10	28	49	12	30
21	68.79	63.91	46	10	28	52	12	30
22	71.81	66.93	50	12	28	55	12	30
23	74.83	69.95	52	12	28	58	12	30
24	77.85	72.97	52	12	28	61	12	30
25	80.88	76.00	57	12	28	64	12	30
26	83.90	79.02	58	12	28	67	12	30
27	86.93	82.04	58	12	28	70	12	30
28	89.95	85.07	60	12	28	73	12	30
30	96.00	91.12	60	12	28			
PLATEWHEELS			S	D	T			
Z	d _e	d _p	D ₁	D ₂	D ₃			
30	96.00	91.12		12				
32	102.06	97.17	12					
36	114.17	109.29	12					
38	120.22	115.34	12	14				
40	126.28	121.40	12					
45	141.43	136.55	16	16				
48	150.52	145.64	16					
57	177.79	172.91	16	16				
76	235.37	230.49	20	20				

ASA 35

PITCH 3/8" × 3/16"

For chain Acc.to DIN 8188
ISO/R606




SPROCKETS & PLATEWHEELS mm

Tooth radius r ₃	10
Radius width C	1.2
Tooth width B ₁	4.4
Tooth width b ₁	4.3
Tooth width B ₂	14.4

CHAIN mm

Pitch	9.525
Internal width	4.77
Roller Φ	5.08
Material: C 45	

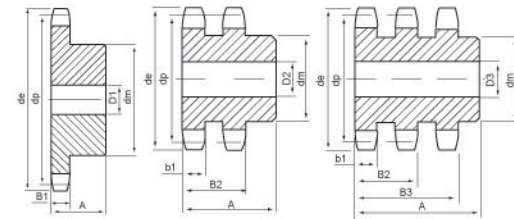


SPROCKETS			SIMPLEX			DUPLEX			TRIPLEX		
Z	d _e	d _p	d _m	D ₁	A	d _m	D ₂	A	d _m	D ₃	A
10	47.66	41.10	26	10	25						
11	51.64	45.08	29	10	25						
12	55.63	49.07	33	10	28				35	14	50
13	59.63	53.07	35	10	28	38	12	35	38	14	50
14	63.63	57.07	41	10	28	42	12	35	42	14	50
15	67.64	61.08	45	10	28	46	12	35	46	14	50
16	71.66	65.10	48	10	28	50	14	35	50	16	50
17	75.68	69.12	48	10	28	54	14	35	54	16	50
18	79.70	73.14	56	12	28	58	14	35	58	16	50
19	83.72	77.16	60	12	28	62	14	35	62	16	50
20	87.74	81.18	60	12	28	66	14	35	66	16	50
21	91.77	85.21	65	12	28	70	16	40	70	20	55
22	95.80	89.24	65	12	28	70	16	40	70	20	55
23	99.83	93.27	65	12	28	70	16	40	70	20	55
24	103.86	97.30	70	14	28	75	16	40	75	20	55
25	107.89	101.33	70	14	28	80	16	40	80	20	55
26	111.92	105.36	70	14	28	85	16	40	85	20	55
27	115.96	109.40	70	16	30	85	16	40	85	20	55
28	119.99	113.43	70	16	30	90	16	40	90	20	55
30	128.06	121.50	80	16	30	100	16	40			
32	136.13	129.57	80	16	30						
35	148.24	141.68	90	16	30						
36	152.28	145.72	90	16	30						
38	160.35	153.79	90	16	35						
40	168.43	161.87	90	16	35						
PLATEWHEELS			S	D	T						
Z	d _e	d _p	D ₁	D ₂	D ₃						
30	128.06	121.50			20						
32	136.13	129.57		16							
38	160.35	153.79		20	25						
40	168.43	161.87		20							
42	176.50	169.94	20								
45	188.62	182.06	20	20	25						
48	200.74	194.18	20								
57	237.10	230.54	20	25	25						
76	313.88	307.32	25	25	25						
95	390.67	384.11	25	25	25						

ASA 40

PITCH 1/2" × 5/16"

For chain Acc.to DIN 8188
ISO/R606



SPROCKETS & PLATEWHEELS mm

Tooth radius r ₃	13.5
Radius width C	1.6
Tooth width B ₁	7.4
Tooth width b ₁	7.2
Tooth width B ₂	21.6
Tooth width B ₃	36

CHAIN mm

Pitch	12.7
Internal width	7.94
Roller Φ	7.94
Material: C 45	

